

C 2 Manual / 说明书

Specification / 产品规格:

Model/型号: C 2

Color/颜色: Silver / Black / Red / Blue
银色 / 黑色 / 红色 / 蓝色

Material/材质: Aluminum / 铝(T 1.5+1.2+1.0mm)

HDD Support: ITX-MB: 2* 3.5 HDD", 2*SSD"

硬盘空间 (base plate do not install fan/底板不装风扇)

Or/或 1*3.5 HDD, 1*SSD"

(install fan on base plate/底板装风扇)

M-ATX-MB:1* 3.5 HDD ,Or 1*SSD"

PSU/电源: PSII (ATX)


Motherboard/主板: ITX / M-ATX (245 x 215mm)

System Fan/系统风扇: 140/120mm * 1 (not built-in/非标配)


Compatibility: Length of display card/显卡长度 220 mm

/ 兼容设备 Height of CPU Cooling/CPU 散热器高度 80 mm

Size/尺寸: D 224 * W 200 * H 262 mm



Schematic Diagram / 产品装机示意图

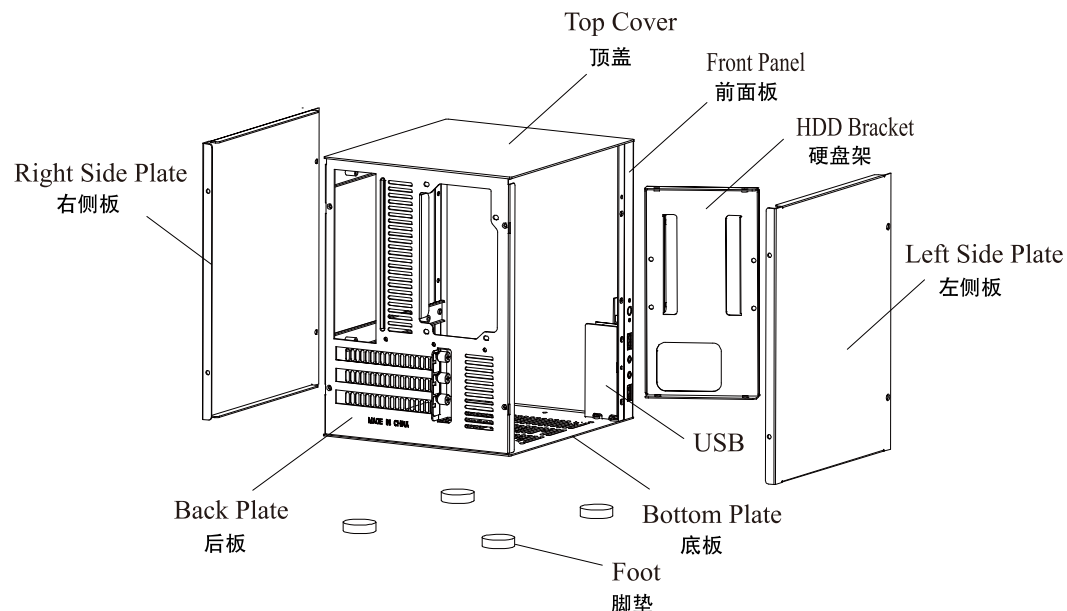


Accessory Box Instruction / 配件包说明

	SSD Bracket SSD 硬盘	8PCS		For locking Fans 风扇螺丝	4PCS
	For locking motherboard and PSU / 锁主板及电源硬盘	18PCS		Gasket 垫片	10PCS
	For binding cables 将线材束整齐	3PCS		For locking Foot 脚垫螺丝	4PCS
	Foot 脚垫	4PCS			


Connection Instruction / 连接说明

USB 2.0 Connection / 连接	USB 3.0 Connection / 连接
 USB+5V, LP-, LP+, GND, NC, USB+5V, LP-, LP+, GND	 VBUS, SSRX1+, SSRX1-, GND, SSTX1+, SSTX1-, GND, D1+, D1-, D2+, D2-
HD AUDIO Connection / 连接	Hard drive LED Connection / 硬盘灯连接
 PORT 1L, PORT 1R, PORT 2R, SENCE_SEND, PORT 2L, AUG GND, PRESENCE, SENSE1_RETURN, SENSE2_RETURN	 +, -, HDD LED
Power Button Connection / 电源开关连接	Power LED Connection / 电源灯连接
 +, -, POWER SW	 +, -, POWER LED


Installation Procedure For ITX Motherboard / ITX 主板推荐安装步骤

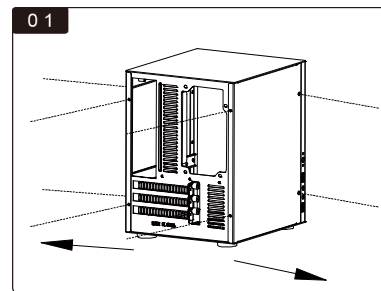


01
Unscrew 8 screws and remove both side plates.
松开8颗螺丝，取下左右侧板。

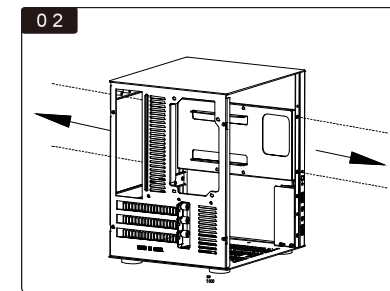


02
Remove the 4 screws on the HDD bracket.
取下硬盘架的4颗螺丝。

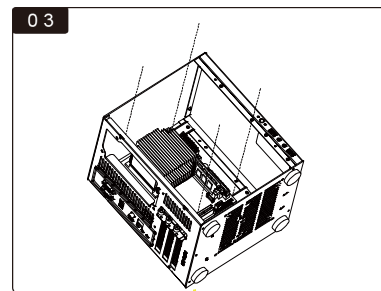


03
Install motherboard and lock 4 screws.
装上主板并锁上4颗螺丝。

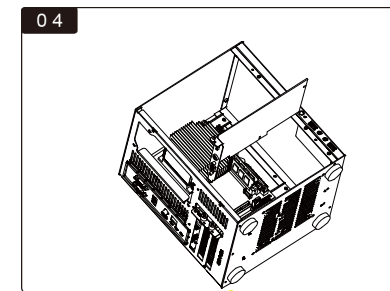


04
Install display card and lock toolless screws.
装上显卡，锁上手拧螺丝。

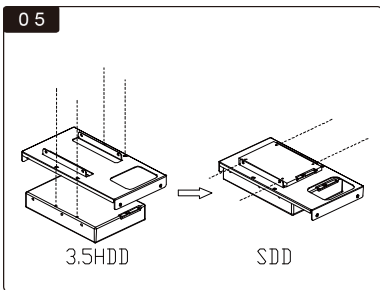


Install 3.5HDD and SSD, please be noted that the back of SSD is facing outwards .
装上3.5硬盘和SSD, 注意SSD是反面向外。

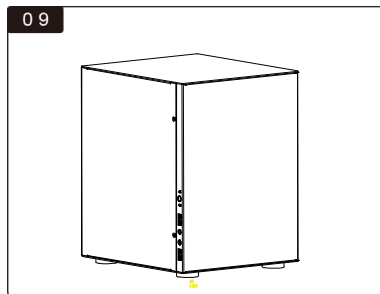

Install both side plates ,
assembly finished.
装回左右侧板, 安装完成。

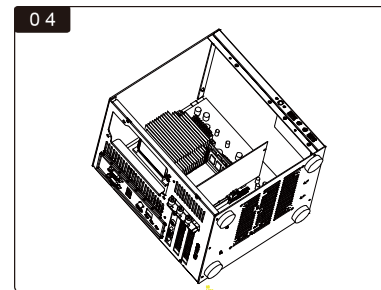


Install display card and lock toolless
screws.
装上显卡, 锁上手拧螺丝。

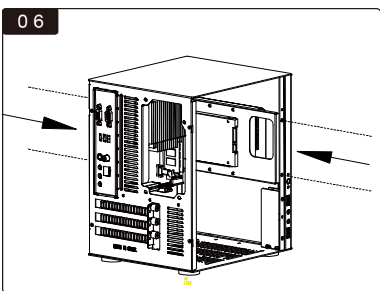


Install HDD bracket.
装回硬盘架。

Installation Procedure For Micro-ATX Motherboard


Micro-ATX (245 x 215mm)主板推荐安装步骤

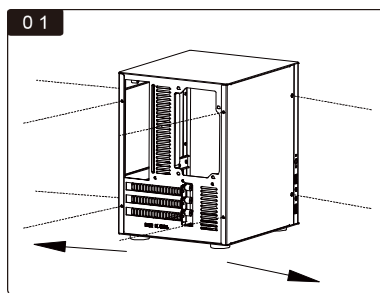


Unscrew 8 screws and remove
both side plates.
松开8颗螺丝, 取下左右侧板。

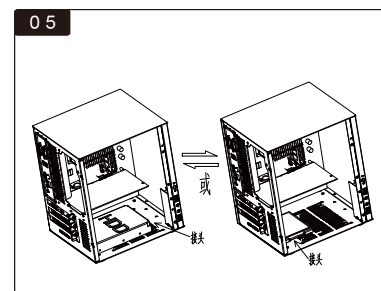


One 3.5HDD or SSD can be installed
on base plate .
底板可以装1个3.5硬盘或1个SSD。

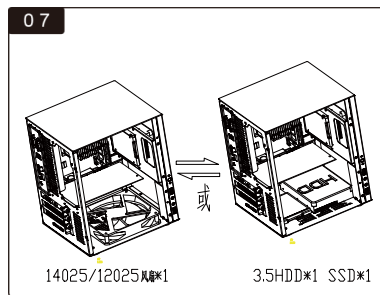


Install fan or HDD.
装上风扇或硬盘。

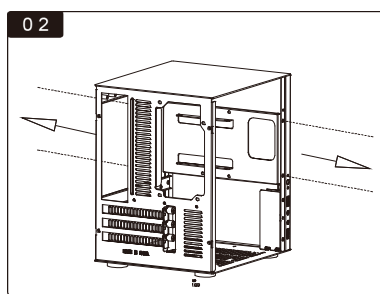


Remove those 4 screws on
HDD bracket screws.
取下硬盘架的4颗螺丝。

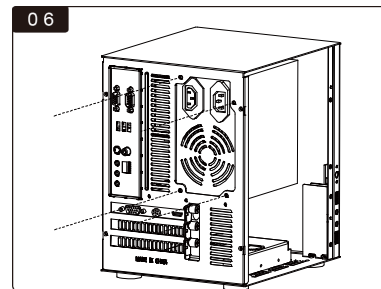


Install PSU, lock with 4 screws.
装上电源, 锁上4颗螺丝。

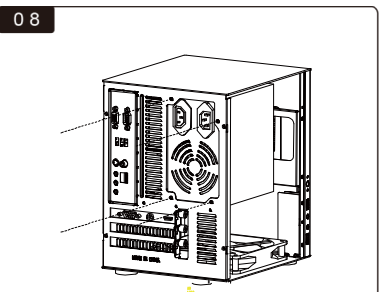

Install PSU , lock with 4 screws.
装上电源, 锁上4颗螺丝。

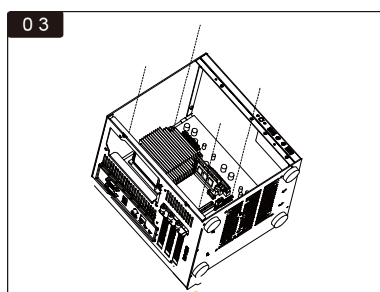

Install Micro-ATX motherboard
and lock 4 screws .
装上Micro-ATX主板锁上4颗螺丝。

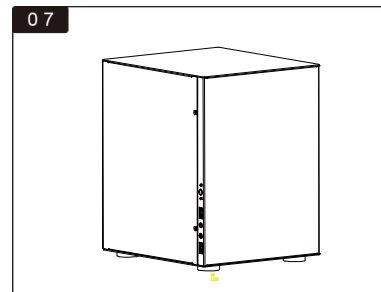

Install both side plates ,
assembly finished.
装回左右侧板, 安装完成。